

This is the most comprehensive input switching device we manufacture and as such, should cover all of your likely needs both now and in the future. A set of push button customisation labels are provided for correctly identifying each input.

QED

MADE IN ENGLAND
TYPE NO. MB 41



Input Expander
6 Way

CONNECT TWO TAPE DECKS & UPTO FOUR
LINE LEVEL INPUTS TO YOUR HI-FI SYSTEM

6 way Input Expander

INDEPENDENT EARTH WIRING

QED

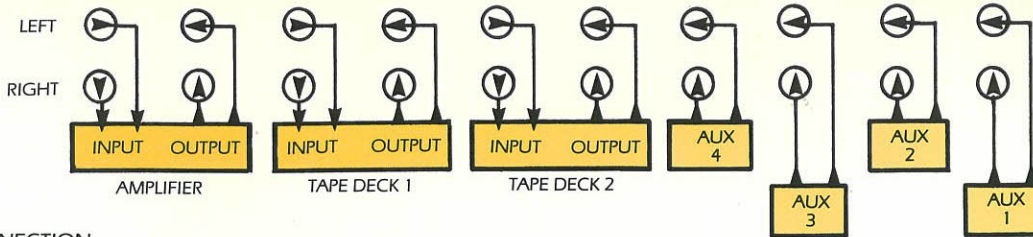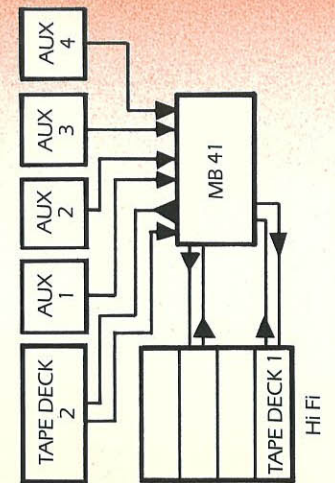

CONNECTION

To connect the MB 41, it is first necessary to disconnect TAPE DECK ONE from the AMPLIFIER and route it through the MB 41 as shown. Two additional pairs of cables will be required to connect the MB 41 to the AMPLIFIER. Both TAPE DECKS and upto four extra inputs are connected directly to the MB 41.

OPERATION

When using either TAPE DECK ONE or TAPE DECK TWO for recording or playback via the AMPLIFIER, just select the appropriate button T1 or T2 respectively.

When recording from TAPE DECK ONE to TAPE DECK TWO or vice versa, simply select the button marked T1 > T2 or T2 > T1.

The signal is automatically routed back to the amplifier for monitoring purposes. Either of the other four line level inputs can be selected just by pressing the appropriate button. The signal is then routed back to the amplifier **and** to both TAPE DECK ONE and TAPE DECK TWO for recording purposes if required.

NOTE When using the MB 41 the amplifier 'tape' input needs to be selected.